

Plastic fittings for PVC flexible conduits



3810 06

ALFA Nylon

Fixed male fitting with mechanical tightening,
suitable for plain PVC conduits.

PG thread

pack (pcs)	cat. nos. grey	thread size	inside conduit diameter	rt cat. nos.
25	3810 21	PG7	10	81021
25	3810 22	PG9	10	81022
25	3810 23	PG11	10	81023
25	3810 35	PG13.5	10	81035
20	3810 24	PG11	12	81024
20	3810 25	PG13.5	12	81025
10	3810 26	PG13.5	15	81026
10	3810 27	PG16	15	81027
5	3810 28	PG21	20	81028
5	3810 29	PG29	27	81029

Gas thread

pack (pcs)	cat. nos. grey	thread size	inside conduit diameter	rt cat. nos.
25	3810 01	G1/4"	10	81001
25	3810 02	G3/8"	10	81002
20	3810 03	G3/8"	12	81003
20	3810 04	G1/2"	12	81004
10	3810 05	G1/2"	15	81005
10	3810 06	G3/4"	20	81006
5	3810 07	G1"	27	81007


Plastic fittings for PVC flexible conduits

ALFA Nylon

Characteristics:

material: polyamide PA6 fibre glass UL94-V0 reinforced
temperature rating: -20°C +80°C
index of protection: IP67 with GE-PVC conduits
heat resistance: glow wire test at 850°C
conduits: GE-PVC page 26

Dimensions:



PG thread	DIMENSIONS (mm)			
Cat. nos. grey	Ø PU	CH1	CH2	L
3810 21	9	22	24	10
3810 22	9	22	24	10
3810 23	9	22	24	12
3810 35	9	22	24	12
3810 24	10	25	26	12
3810 25	10	25	26	12
3810 26	14.5	27	29	12
3810 27	14.5	27	29	12
3810 28	19	35	37	14
3810 29	24	42	45	14

Gas thread	DIMENSIONS (mm)			
Cat. nos. grey	Ø PU	CH1	CH2	L
3810 01	9	22	24	10
3810 02	9	22	24	12
3810 03	10	25	26	12
3810 04	10	25	26	12
3810 05	14.5	27	29	12
3810 06	19	35	37	14
3810 07	24	42	45	16

Plastic fittings for PVC flexible conduits



Universale

Fixed male fitting with mechanical tightening, suitable for all PVC conduits.

ISO thread

pack (pcs)	cat. nos. black	thread	conduit diameter		rt a cat. nos.
			inside min	outside max	
100	3829 51	M16x1.5	10	16.5	82951
100	3829 52	M16x1.5	12	18.5	82952
100	3829 53	M20x1.5	12	18.5	82953
50	3829 54	M20x1.5	15	21.5	82954
50	3829 55	M25x1.5	20	26.5	82955
25	3829 56	M32x1.5	27	33.5	82956
25	3829 57	M32x1.5	25	32.5	82957
25	3829 58	M32x1.5	32	40.5	82958
10	3829 59	M40x1.5	39	50.5	82959
10	3829 60	M50x1.5	44	53.5	82960
10	3829 98	M50x1.5	50	61.5	82998

pack (pcs)	cat. nos. grey	thread	conduit diameter		rt a cat. nos.
			inside min	outside max	
100	3829 20	M12x1.5	8	15	382920
100	3829 21	M16x1.5	10	16.5	82921
100	3829 22	M16x1.5	12	18.5	82922
100	3829 23	M20x1.5	12	18.5	82923
50	3829 24	M20x1.5	15	21.5	82924
50	3829 25	M25x1.5	20	26.5	82925
25	3829 26	M32x1.5	27	33.5	82926
25	3829 27	M32x1.5	25	32.5	82927
25	3829 28	M32x1.5	32	40.5	82928
10	3829 79	M40x1.5	34.5	44	382979
10	3829 29	M40x1.5	39	50.5	82929
10	3829 30	M50x1.5	44	53.5	82930
10	3829 97	M50x1.5	50	61.5	82997

pack (pcs)	cat. nos. RAL7035	thread	conduit diameter		rt a cat. nos.
			inside min	outside max	
100	3829 81	M16x1.5	10	16.5	82981
100	3829 82	M16x1.5	12	18.5	82982
100	3829 83	M20x1.5	12	18.5	82983
50	3829 84	M20x1.5	15	21.5	82984
50	3829 85	M25x1.5	20	26.5	82985
25	3829 86	M32x1.5	27	33.5	82986
25	3829 87	M32x1.5	25	32.5	82987
25	3829 88	M32x1.5	32	40.5	82988
10	3829 89	M40x1.5	39	50.5	82989
10	3829 90	M50x1.5	44	53.5	82990
10	3829 99	M50x1.5	50	61.5	82999

NOTE: minimum recommended conduit thickness: 2 mm


Plastic fittings for PVC flexible conduits

Universale

Characteristics:

material: polyamide PA6 fibre glass UL94-V0 reinforced
 temperature rating: -20°C +80°C
 index of protection: IP 65 with GE-PVC conduits
 IP 44 with FX-FP-FP2000 conduits
 heat resistance: glow wire test at 850°C
 conduits : GE-PVC page 26
 FX page 27
 FP page 29
 FP2000 page 30

Dimensions:



ISO thread			DIMENSIONS (mm)			
Cat. nos.			Ø PU	CH1	CH2	L
black	grey	RAL7035				
	3829 20		6	24	25	10
3829 51	3829 21	3829 81	8	24	25	10
3829 52	3829 22	3829 82	10	26	28	12
3829 53	3829 23	3829 83	10	26	28	12
3829 54	3829 24	3829 84	13	31	34	13
3829 55	3829 25	3829 85	18	36	40	14
3829 56	3829 26	3829 86	24	45	48	15
3829 57	3829 27	3829 87	23	42	45	15
3829 58	3829 28	3829 88	27	51	56	15
3829 59	3829 29	3829 89	34	61	67	15
3829 60	3829 30	3829 90	39	66	72	15
3829 98	3829 97	3829 99	45.5	73	80	20
	3829 79		30	54	60	15

Plastic fittings for PVC flexible conduits



3429 16

Universale

Fixed male fitting with mechanical tightening,
suitable for all PVC conduits

PG thread

pack (pcs)	cat. nos. black	thread size	conduit diameter		rt a cat. nos.
			inside min	outside max	
100	3829 41	PG9	10	16	82941
100	3829 42	PG11	12	18	82942
100	3829 43	PG13.5	12	18	82943
50	3829 44	PG13.5	15	21.5	82944
50	3829 45	PG16	15	21.5	82945
50	3829 46	PG21	20	26.5	82946
25	3829 47	PG29	27	33.5	82947

pack (pcs)	cat. nos. grey	thread size	conduit diameter		rt a cat. nos.
			inside min	outside max	
100	3429 00	PG7	8	15	3829 00
100	3429 11	PG9	10	16	82911
100	3429 12	PG11	12	18	82912
100	3429 13	PG13.5	12	18.5	82913
50	3429 14	PG13.5	15	21.5	82914
50	3429 15	PG16	15	21.5	82915
50	3429 16	PG21	20	26.5	82916
25	3429 17	PG29	27	33.5	82917
25	3429 18	PG36	34.5	44	3829 18

pack (pcs)	cat. nos. RAL7035	thread size	conduit diameter		rt a cat. nos.
			inside min	outside max	
100	3829 71	PG9	10	16	82971
100	3829 72	PG11	12	18	82972
100	3829 73	PG13.5	12	18	82973
50	3829 74	PG13.5	15	21.5	82974
50	3829 75	PG16	15	21.5	82975
50	3829 76	PG21	20	26.5	82976
25	3829 77	PG29	27	33.5	82977

NOTE: minimum recommended conduit thickness: 2 mm


Plastic fittings for PVC flexible conduits

Universale

Characteristics:

material: polyamide PA6 fibre glass UL94-V0 reinforced
 temperature rating: - 20°C + 80°C
 index of protection: IP 65 with GE-PVC conduits
 IP 44 with FX-FP-FP2000 conduits
 heat resistance: glow wire test at 850°C
 conduits : GE-PVC page 26
 FX page 27
 FP page 29
 FP2000 page 30

Dimensions:



PG thread			DIMENSIONS (mm)			
Cat. nos.			Ø PU	CH1	CH2	L
black	grey	RAL7035				
	3829 00		6	24	25	10
3829 41	3829 11	3829 71	8	24	25	10
3829 42	3829 12	3829 72	10	26	28	12
3829 43	3829 13	3829 73	10	26	28	13
3829 44	3829 14	3829 74	13	31	34	13
3829 45	3829 15	3829 75	13	31	34	13
3829 46	3829 16	3829 76	18	36	40	14
3829 47	3829 17	3829 77	24	45	48	15
	3829 18		30	54	60	15

Plastic fittings for PVC flexible conduits



Universale

Fixed male fitting with mechanical tightening, suitable for all PVC conduits.

GAS thread

pack (pcs)	cat. nos. black	thread size	conduit diameter inside min	conduit diameter outside max	rt a cat. nos.
100	3829 31	G1/4"	10	16.5	82931
100	3829 32	G3/8"	10	16.5	82932
100	3829 33	G3/8"	12	18.5	82933
100	3829 34	G1/2"	12	18.5	82934
50	3829 35	G1/2"	15	21.5	82935
50	3829 36	G3/4"	20	26.5	82936
25	3829 37	G1"	27	33.5	82937
25	3829 38	G1"	25	32.5	82938
25	3829 39	G1"	32	40.5	82939
10	3829 40	G1 1/4"	39	50.5	82940
10	3829 93	G1 1/2"	44	53.5	82993
10	3829 94	G2"	50	61.5	82994

pack (pcs)	cat. nos. grey	thread size	conduit diameter inside min	conduit diameter outside max	rt a cat. nos.
100	3829 01	G1/4"	10	16.5	82901
100	3829 02	G3/8"	10	16.5	82902
100	3829 03	G3/8"	12	18.5	82903
100	3829 04	G1/2"	12	18.5	82904
50	3829 05	G1/2"	15	21.5	82905
50	3829 06	G3/4"	20	26.5	82906
25	3829 07	G1"	27	33.5	82907
25	3829 08	G1"	25	32.5	82908
25	3829 09	G1"	32	40.5	82909
10	3829 10	G1 1/4"	39	50.5	82910
10	3829 91	G1 1/2"	44	53.5	82991
10	3829 92	G2"	50	61.5	82992

pack (pcs)	cat. nos. RAL7035	thread size	conduit diameter inside min	conduit diameter outside max	rt a cat. nos.
100	3829 61	G1/4"	10	16.5	82961
100	3829 62	G3/8"	10	16.5	82962
100	3829 63	G3/8"	12	18.5	82963
100	3829 64	G1/2"	12	18.5	82964
50	3829 65	G1/2"	15	21.5	82965
50	3829 66	G3/4"	20	26.5	82966
25	3829 67	G1"	27	33.5	82967
25	3829 68	G1"	25	32.5	82968
25	3829 69	G1"	32	40.5	82969
10	3829 70	G1 1/4"	39	50.5	82970
10	3829 95	G1 1/2"	44	53.5	82995
10	3829 96	G2"	50	61.5	82996

NOTE: minimum recommended conduit thickness: 2 mm


Plastic fittings for PVC flexible conduits

Universale

Characteristics:

material: polyamide PA6 fibre glass UL94-V0 reinforced
temperature rating: -20°C +80°C
index of protection: IP 65 with GE-PVC conduits
IP 44 with FX-FP-FP2000 conduits
heat resistance: glow wire test at 850°C
conduits : GE-PVC page 26
FX page 27
FP page 29
FP2000 page 30

Dimensions:



Gas thread			DIMENSIONS (mm)			
Cat. nos.			Ø PU	CH1	CH2	L
black	grey	RAL7035				
3829 31	3829 01	3829 61	8	24	25	10
3829 32	3829 02	3829 62	8	24	25	12
3829 33	3829 03	3829 63	10	26	28	12
3829 34	3829 04	3829 64	10	26	28	13
3829 35	3829 05	3829 65	13	31	34	13
3829 36	3829 06	3829 66	18	36	40	14
3829 37	3829 07	3829 67	24	45	48	15
3829 38	3829 08	3829 68	23	42	45	15
3829 39	3829 09	3829 69	27	51	56	15
3829 40	3829 10	3829 70	34	61	67	15
3829 93	3829 91	3829 95	39	66	72	15
3829 94	3829 92	3829 96	45.5	73	80	20

Plastic fittings for PVC flexible conduits



3815 24

MF Nylon

One-piece fixed male fitting, suitable for corrugated PVC conduits.

PG thread

pack (pcs)	cat. nos. grey	thread size	inside conduit diameter	rtA cat. nos.
100	3815 21	PG9	10	81521
100	3815 22	PG11	13	81522
100	3815 23	PG13.5	13	81523
100	3815 24	PG13.5	15	81524
50	3815 25	PG16	15	81525
50	3815 26	PG16	17	81526
50	3815 27	PG21	21	81527
25	3815 28	PG29	28	81528
25	3815 29	PG36	37.5	81529
25	3815 30	PG42	45	81530
10	3815 31	PG48	52	81531

GAS thread

pack (pcs)	cat. nos. grey	thread size	inside conduit diameter	rtA cat. nos.
100	3815 01	G1/4"	10	81501
100	3815 02	G3/8"	10	81502
100	3815 03	G1/2"	13	81503
100	3815 04	G1/2"	15	81504
50	3815 05	G3/4"	21	81505
25	3815 06	G1"	28	81506
25	3815 07	G1 1/4"	37.5	81507
25	3815 08	G1 1/2"	45	81508
10	3815 09	G2"	52	81509


Plastic fittings for PVC flexible conduits

MF Nylon

Characteristics:

material: polyamide PA6 fibre glass UL94-V0 reinforced
 temperature rating: -20°C +80°C
 index of protection: IP 55 with FX-FP conduits
 heat resistance : glow wire test 850°C
 conduits: FX page 27
 FP page 29

Dimensions:



PG thread	DIMENSIONS (mm)		
Cat. nos. grey	Ø PU	CH	L
3815 21	8	19	8.5
3815 22	11	24	9
3815 23	11	24	9
3815 24	12.5	24	9
3815 25	12.5	24	9
3815 26	15	26	10
3815 27	18	30	10
3815 28	23	38	12
3815 29	31	46	12
3815 30	38	55	12
3815 31	48	65	20

Gas thread	DIMENSIONS (mm)		
Cat. nos. grey	Ø PU	CH	L
3815 01	8	19	8.5
3815 02	8	19	8.5
3815 03	11	24	9
3815 04	12.5	24	9
3815 05	18	30	10
3815 06	23	38	13.5
3815 07	31	46	13.5
3815 08	38	55	13.5
3815 09	48	65	20

Plastic fittings
for PVC flexible conduits



3816 94

MG Nylon

One-piece swivelling male fitting, suitable for corrugated PVC conduits.

ISO thread


pack (pcs)	cat. nos. black	thread size	inside conduit diameter	rt cat. nos.
100	3816 91	M16x1.5	10	81691
100	3816 92	M20x1.5	13	81692
100	3816 93	M20x1.5	15	81693
50	3816 94	M25x1.5	21	81694
25	3816 95	M32x1.5	28	81695

Plastic fittings
for PVC flexible conduits

MG Nylon

Characteristics:
material: polyamide PA6 fibre glass UL94-V0 reinforced
temperature rating: -20°C +80°C
index of protection: IP 42 with FX-FP conduits
heat resistance : glow wire test 850°C
conduits: FX page 27
FP page 29

Dimensions:

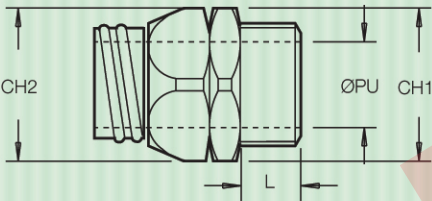

ISO thread	DIMENSIONS (mm)			
Cat.nos. black	Ø PU	CH1	CH2	L
3816 91	8	19	19	9
3816 92	11	24	24	9
3816 93	12.5	24	24	9
3816 94	18	30	30	10
3816 95	23	38	38	14

Plastic fittings for PVC flexible conduits



3814 90

MG Nylon

One-piece swivelling male fitting, suitable for corrugated PVC conduits.

PG thread

pack (pcs)	cat. nos. black	thread size	inside conduit diameter	rt a cat. nos.
100	3816 72	PG9	10.5	81672
100	3816 73	PG11	10.5	81673
100	3816 74	PG13.5	10.5	81674
100	3816 75	PG11	13.5	81675
100	3816 76	PG13.5	13.5	81676
100	3816 77	PG13.5	15.5	81677
100	3816 78	PG16	15.5	81678
50	3816 79	PG16	17.5	81679
50	3816 80	PG21	21.5	81680
25	3816 81	PG29	28.5	81681
25	3816 82	PG36	37.5	81682
25	3816 83	PG42	45.5	81683
10	3816 84	PG48	52.5	81684

pack (pcs)	cat. nos. grey	thread size	inside conduit diameter	rt a cat. nos.
100	3816 22	PG9	10.5	81622
100	3816 23	PG11	10.5	81623
100	3816 24	PG13.5	10.5	81624
100	3816 25	PG11	13.5	81625
100	3816 26	PG13.5	13.5	81626
100	3816 27	PG13.5	15.5	81627
100	3816 28	PG16	15.5	81628
50	3816 29	PG16	17.5	81629
50	3816 30	PG21	21.5	81630
25	3816 31	PG29	28.5	81631
25	3816 32	PG36	37.5	81632
25	3816 33	PG42	45.5	81633
10	3816 34	PG48	52.5	81634

pack (pcs)	cat. nos. RAL7035	thread size	inside conduit diameter	rt a cat. nos.
100	3814 82	PG9	10.5	81482
100	3814 83	PG11	10.5	81483
100	3814 84	PG13.5	10.5	81484
100	3814 85	PG11	13.5	81485
100	3814 86	PG13.5	13.5	81486
100	3814 87	PG13.5	15.5	81487
100	3814 88	PG16	15.5	81488
50	3814 89	PG16	17.5	81489
50	3814 90	PG21	21.5	81490
25	3814 91	PG29	28.5	81491
25	3814 92	PG36	37.5	81492
25	3814 93	PG42	45.5	81493
10	3814 94	PG48	52.5	81494


Plastic fittings for PVC flexible conduits

MG Nylon

Characteristics:

material: polyamide PA6 fibre glass UL94-V0 reinforced
 temperature rating: -20°C +80°C
 index of protection: IP 42 with FX-FP conduits
 heat resistance : glow wire test 850°C
 conduits: FX page 27
 FP page 29

Dimensions:

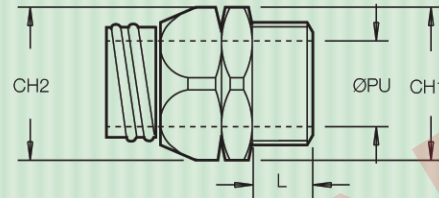

PG thread			DIMENSIONS (mm)			
Cat. nos.			Ø PU	CH1	CH2	L
black	grey	RAL7035				
3816 72	3816 22	3814 82	8	19	19	9
3816 73	3816 23	3814 83	8	19	19	9
3816 74	3816 24	3814 84	8	19	19	9
3816 75	3816 25	3814 85	11	24	24	9
3816 76	3816 26	3814 86	11	24	24	9
3816 77	3816 27	3814 87	12.5	24	24	9
3816 78	3816 28	3814 88	12.5	26	24	9
3816 79	3816 29	3814 89	15	26	26	9
3816 80	3816 30	3814 90	18	30	30	10
3816 81	3816 31	3814 91	23	38	38	13
3816 82	3816 32	3814 92	31	46	46	13
3816 83	3816 33	3814 93	38	55	55	12
3816 84	3816 34	3814 94	48	65	65	19

Plastic fittings for PVC flexible conduits



3814 67

MG Nylon

One-piece swivelling male fitting, suitable for corrugated PVC conduits.

Gas thread

pack (pcs)	cat. nos. black	thread size	inside conduit diameter	rt a cat. nos.
100	3816 52	G1/4"	10.5	81652
100	3816 53	G3/8"	10.5	81653
100	3816 54	G1/2"	10.5	81654
100	3816 55	G1/2"	13.5	81655
100	3816 56	G1/2"	15.5	81656
50	3816 57	G3/4"	21.5	81657
25	3816 58	G1"	28.5	81658
25	3816 59	G1 1/4"	37.5	81659
25	3816 60	G1 1/2"	45.5	81660
10	3816 61	G2"	52.5	81661

pack (pcs)	cat. nos. grey	thread size	inside conduit diameter	rt a cat. nos.
100	3816 02	G1/4"	10.5	81602
100	3816 03	G3/8"	10.5	81603
100	3816 04	G1/2"	10.5	81604
100	3816 05	G1/2"	13.5	81605
100	3816 06	G1/2"	15.5	816 06
50	3816 07	G3/4"	21.5	81607
25	3816 08	G1"	28.5	81608
25	3816 09	G1 1/4"	37.5	81609
25	3816 10	G1 1/2"	45.5	81610
10	3816 11	G2"	52.5	81611

pack (pcs)	cat. nos. RAL7035	thread size	inside conduit diameter	rt a cat. nos.
100	3814 63	G3/8"	10.5	81463
100	3814 64	G1/2"	10.5	81464
100	3814 65	G1/2"	13.5	81465
100	3814 66	G1/2"	15.5	81466
50	3814 67	G3/4"	21.5	81467
25	3814 68	G1"	28.5	81468
25	3814 69	G1 1/4"	37.5	81469
25	3814 70	G1 1/2"	45.5	81470
10	3814 71	G2"	52.5	81471


Plastic fittings for PVC flexible conduits

MG Nylon

Characteristics:

material: polyamide PA6 fibre glass UL94-V0 reinforced
 temperature rating: -20°C +80°C
 index of protection: IP 42 with FX-FP conduits
 heat resistance : glow wire test 850°C
 conduits: FX page 27
 FP page 29

Dimensions:

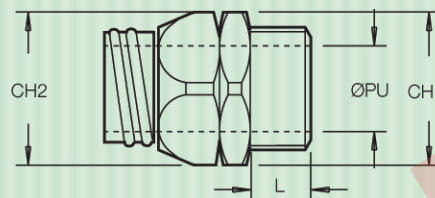

Gas thread			DIMENSIONS (mm)			
Cat. nos.			Ø PU	CH1	CH2	L
black	grey	RAL7035				
3816 52	3816 02	-	5	19	19	8
3816 53	3816 03	3814 63	8	19	19	9
3816 54	3816 04	3814 64	8	19	19	9
3816 55	3816 05	3814 65	11	24	24	9
3816 56	3816 06	3814 66	12.5	24	24	9
3816 57	3816 07	3814 67	18	30	30	10
3816 58	3816 08	3814 68	23	38	38	14
3816 59	3816 09	3814 69	31	46	46	13
3816 60	3816 10	3814 70	38	55	55	12
3816 61	3816 11	3814 71	48	65	65	19

Metal fittings for PVC flexible conduits



3811 23

Alfa Metal

Fixed male nickel-plated brass fitting with mechanical tightening, suitable for plain PVC conduits.

PG thread

pack (pcs)	cat. nos.	thread size	inside conduit diameter	rt a cat. nos.
100	3811 19	PG9	6	81119
100	3811 20	PG7	6	81120
100	3811 21	PG7	10	81121
100	3811 22	PG9	10	81122
100	3811 23	PG11	10	81123
100	3811 24	PG11	12	81124
100	3811 25	PG13.5	12	81125
50	3811 26	PG13.5	15	81126
50	3811 27	PG16	15	81127
50	3811 28	PG21	20	81128

Gas thread

pack (pcs)	cat. nos.	thread size	inside conduit diameter	rt a cat. nos.
100	3811 00	G1/4"	6	81100
100	3811 01	G1/4"	10	81101
100	3811 02	G3/8"	10	81102
100	3811 03	G3/8"	12	81103
100	3811 04	G1/2"	12	81104
50	3811 05	G1/2"	15	81105
50	3811 06	G3/4"	20	81106


Metal fittings for PVC flexible conduits

Alfa Metal

Characteristics:

material: Brass UNI EN 12164 CW 614N
nickel plating: 2-5 μm
index of protection: IP67 with GE-PVC conduits
conduit system: GE-PVC page 26

Dimensions:



PG thread	DIMENSIONS (mm)			
Cat. nos.	Ø PU	CH1	CH2	L
3811 19	5.8	18	16	8
3811 20	5.8	15	16	8
3811 21	9	18	20	8
3811 22	9	18	20	8
3811 23	9	18	20	8
3811 24	10.5	20	22	8
3811 25	10.5	22	22	8
3811 26	13.5	24	26	8
3811 27	13.5	24	26	8
3811 28	19	30	32	8

Gas thread	DIMENSIONS (mm)			
Cat. nos.	Ø PU	CH1	CH2	L
3811 00	5.8	15	16	8
3811 01	9	18	20	8
3811 02	9	18	20	8
3811 03	10.5	20	22	8
3811 04	10.5	22	22	8
3811 05	13.5	24	26	8
3811 06	19	30	32	8

Metal fittings for overbraided flexible conduits



3812 28

Delta

One-piece fixed male fitting, nickel plated brass, specific for GETR conduit. For correct assembly protection rings and metal collars are recommended.

PG thread

pack (pcs)	cat. nos.	thread size	inside conduit diameter	rt a cat. nos.
100	3812 21	PG9	10	81221
100	3812 38	PG9	12	81238
100	3812 22	PG11	12	81222
100	3812 23	PG13.5	12	81223
100	3812 24	PG16	12	81224
100	3812 25	PG13.5	15	81225
100	3812 26	PG16	15	81226
50	3812 27	PG13.5	20	81227
50	3812 28	PG16	20	81228
50	3812 29	PG21	20	81229
25	3812 30	PG21	27	81230
10	3812 31	PG29	36	81231
10	3812 32	PG36	40	81232
5	3812 33	PG36	47	81233
5	3812 34	PG42	47	81234
4	3812 35	PG48	58	81235

Gas thread

pack (pcs)	cat. nos.	thread size	inside conduit diameter	rt a cat. nos.
100	3812 01	G1/4"	10	81201
100	3812 02	G3/8"	12	81202
100	3812 03	G1/2"	12	81203
100	3812 04	G1/2"	15	81204
50	3812 05	G1/2"	20	81205
50	3812 06	G3/4"	20	81206
25	3812 07	G3/4"	27	81207
25	3812 08	G1"	27	81208
10	3812 09	G1"	36	81209
10	3812 10	G1 1/4"	40	81210
5	3812 11	G1 1/2"	47	81211
4	3812 12	G2"	58	81212

Metal fittings for overbraided flexible conduits

Delta

Characteristics:

material:

UNI EN 12164 CW 614N brass
(up to Øi27 mm)
Nickel plating : 2÷5 µm
Aluminium GD-Al Si 12 Cu 2 Fe UNI 5076-74 (from Øi36 mm)


index of protection:

IP67 with GE PVC conduits
IP67 with GE TR conduits

conduits:

GE TR page 31
GE PVC page 26

Dimensions:

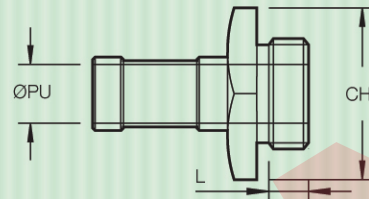

PG thread	DIMENSIONS (mm)		
Cat. nos.	Ø PU	CH	L
3812 21	9	18	8
3812 38	10	20	8
3812 22	10	20	8
3812 23	10	22	8
3812 24	10	24	8
3812 25	12	24	10
3812 26	12	24	10
3812 27	16	27	10
3812 28	16	27	10
3812 29	16	30	10
3812 30	23	35	10
3812 31	30	46	12
3812 32	34	55	14
3812 33	40	60	14
3812 34	40	60	14
3812 35	51	70	16

Gas thread	DIMENSIONS (mm)		
Cat. nos.	Ø PU	CH	L
3812 01	9	18	8
3812 02	10	20	8
3812 03	10	22	8
3812 04	12	24	10
3812 05	16	27	10
3812 06	16	30	10
3812 07	21.5	35	10
3812 08	23	35	10
3812 09	26	46	12
3812 10	34	55	14
3812 11	40	60	14
3812 12	51	70	16

Metal accessories for overbraided flexible conduits



3813 40

Protection ring

Metal ring specific for assemblies combining Delta fitting with GETR conduit, for securing the metal braid wires.

pack (pcs)	cat. nos.	inside conduit diameter	rtA cat. nos.
100	3813 10	10	81310
100	3813 12	12	81312
50	3813 15	15	81315
50	3813 20	20	81320
25	3813 27	27	81327
25	3813 36	36	81336
25	3813 40	40	81340
25	3813 47	47	81347
25	3813 58	58	81358



3813 72

Hose clamp

Metal fixing fitting worm tightening via hexagonal screw.

pack (pcs)	cat. nos.	Ø ext. conduit min+max	rtA cat. nos.
100	3813 60	11 ÷ 17	81360
100	3813 62	13 ÷ 20	81362
50	3813 64	15 ÷ 24	81364
50	3813 66	19 ÷ 28	81366
25	3813 68	26 ÷ 38	81368
25	3813 70	32 ÷ 44	81370
20	3813 72	38 ÷ 50	81372
10	3813 74	44 ÷ 56	81374
10	3813 76	58 ÷ 75	81376

Metal accessories for overbraided flexible conduits



3813 82

Hose clamp with earthing screw

Metal fixing fitting as the previous item, but with additional earthing screw.

pack (pcs)	cat. nos.	Ø ext. conduit min+max	rtA cat. nos.
100	3813 78	8 ÷ 14	81378
100	3813 80	13 ÷ 20	81380
50	3813 82	19 ÷ 28	81382
25	3813 84	32 ÷ 44	81384
25	3813 86	44 ÷ 56	81386
20	3813 88	58 ÷ 75	81388